



STOCK NO. : 002130



WOER TUBE

PRODUCT CATALOGUE

STOCK NO. : 002130

SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO.,LTD.
Woer mansion,North Lanjing Rd,Pingshan,Shenzhen P.R.CHINA

Tel:86-755-28299160,26620597
Fax:86-755-28299160
Email:woer@woer.com
Http://www.woer.com



SHENZHEN WOER HEAT-SHRINKABLE MATERIAL CO.,LTD



WOER- A Global Success

Woer provides electrical and mechanical insulation solutions for the Automotive,Electrical/Utility,Electronics and Communications markets.Founded in 1998, Woer has emerged to become one of the largest heat shrink manufacturers in the world.

Woer is the complete source for heat shrink products and related technology. Our product offering includes polyolefin,

fluoropolymer,elastomer and PE heat shrink based materials in thin,medium and heavy wall tubing as well as heat shrink accessories and equipment. New products are continuously being developed to meet industry requiremnts. Moreover, a commitment to develop unique solutions for customer applications has earned Woer a reputation for excellence in customer satisfaction.

Manufacturing & Distribution

Pingshan Xili Jintan

Research&Development

Pingshan Xili Jintan

Quality Assurance/Environmental Protection


Woer is committed to quality all products in accordance with ISO9001, ISO/TS 16949,ISO 14001. Copies of our certification are available upon request.



Total Contents

A Dual Wall & Other Products Page A01-A58			
Part No.	Item	Pages	
SBRS-(2X)G	Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing	A01	
SBRS-(3X)G	Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing	A03	
SBRS-(4X)G	Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing	A05	
SBRS-(2X)QF	Dual Wall Adhesive-Lined Heat-Shrink Tubing for Automotive Oil-pipe Protection	A07	
SBRS-(3X,4X)GF	Dual Wall Adhesive Lined Cross -linked Polyolefin tubing	A09	
SBRS-(3X)GLW	Flexible, Thick Adhesive-Lined Dual Wall Heat-Shrink Tubing	A11	
SBRS-(3X)H	Halogen Free Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing	A13	
SBRS-(4X)GR	High Shrink Ratio, Semi-rigid Dual Wall Adhesive-Lined Cross-Linked Polyolefin Tubing	A15	
SBRS-(4X)GRF	Highly Flame Retardant Dual Wall Heat Shrink Polyolefin Tubing	A17	
SBRS-(4X)GBK	Adhesive-Lined Cross-Linked Polyolefin Tubing	A19	
SBRS-DZ	Heat Shrink Insulation Connectors	A21	
SBRS-CAPS	Adhesive-Lined Insulating Caps	A23	
SBRS-CAPS NF	Semi-rigid, Adhesive-Lined Insulating Caps	A25	
SBRS-CAPS-RL	Semi-rigid, Adhesive-Lined Insulating Caps	A27	
SBRSM	Flame Retardant Medium Wall Adhesive Lined Heat Shrink Tubing	A29	
SBRSW	Flame Retardant Adhesive-Lined Heavy Wall Cross-linked Polyolefin Heat Shrink Tubing	A31	
SBRSM-NF	Medium Wall Adhesive-lined Cross-linked Polyolefin Heat Shrink Tubing	A33	
SBRSW-NF	Heavy Wall Adhesive-Lined Cross-linked Polyolefin Heat Shrink Tubing	A35	
SBRSTV	Medium Wall Adhesive-lined Heat Variable Heat Shrink Tubing	A37	
WF	PTFE Teflon tubing	A39	
RSFR-TFE	Heat Shrink Teflon Tubing	A41	
RSFR-DR	Diesel Resistant Flexible Elastomeric Heat Shrink Tubing	A43	
RSFR-VDF175 (F-175)	THIN WALL PVDF Heat Shrink Tubing	A45	
RSFR-VT200 (F-200)	Thin Wall Fluoroelastomer Heat Shrink Tubing	A47	
SRG-N/W	Silicone Rubber Braided Tube	A49	
WEPDM	Flexible EPDM Heat-Shrinkable Tubing	A51	
WRSJD	Adhesive Lined Cross-Linked Polyolefin Heat Shrink Tape	A53	
WPET	Expandable Sleeve	A55	
WOLVO	Skidproof Heat Shrink Tubing	A57	

B Identification Products For Wire & Cable Page B01-B19 		
Part No.	Item	Pages
AMS	Military Identification Sleeves	B01
RSFR	Heat Shrink Identification Sleeves	B03
PSFR	High-temperature,Heat Shrinkable Identification Sleeves	B06
HMS	Diesel Resistant Identification Sleeves	B08
HNF	Halogen Free Low Smoke Low hazard Identification Sleeves	B10
PUR	Identification Tags	B12
RSFR/AMS/HMS/HNF	Identification Tags "Ladder Type" Thermal transfer	B14
WO-80500BK	Ribbon Data Sheet	B16
SOFTWARE	WOLABEL-1/3 Software for Wire Marker and Label Printing	B18

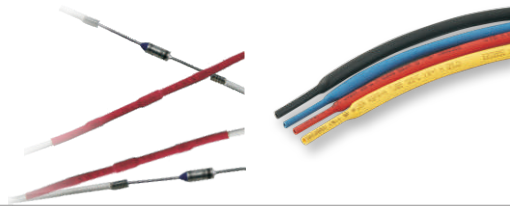C Single Wall Products Page C01-C30 		
Part No.	Item	Pages
RSFR-H (H)	Thin wall halogen free,flexible heat shrink tubing	C01
RSFR-HCB (H)	Ultra thin wall halogen free,flexible heat shrink tubing.	C03
RSFR-H	Universal heat shrink tubing with excellent physical and mechanical properties	C05
RSFR-H(3X)	Universal heat shrink tubing with excellent physical and mechanical properties	C07
RSFR-HCB	Ultra thin wall, very flexible heat shrink tubing	C09
RSFR-(2X, 3X) YG	Yellow/Green stripped thin wall cross-linked polyolefin heat shrink tubing	C11
RSFR-135G(2X)	Flame retardant,multi-purpose heat shrink tubing	C13
RSFR-135G(3X)	Ultra thin wall, very flexible heat shrink tubing	C15
RSFR-105	Economical, non self-extinguishing Halogen free, heat shrink tubing	C17
RSFR-HT(2X)	150℃ Flame retardant heat shrink tubing	C19
PO	Non-shrinkable,Irradiated,Flexible Flame-retardant,Polyolefin Tubing	C21
WMPG	Heat Shrink Busbar Tube	C25
RSFRNH-BTM	Medium Voltage Cross-linked Polyolefin Bus-Bar Tubing	C27
WRS LD	Heat Shrink Neoprene Tube	C29

Comparison Table

Old Part No.	New Part No.
W-1-SB(2X)	SBRS-(2X)G
W-1-SB(3X)	SBRS-(3X)G
W-1-SB(4X)	SBRS(4X)G
GPFS	SBRS-(2X)QF
W-1-SB(4X)-GR	SBRS-(4X)GR
RSTFE	RSFR-TFE
F-175	RSFR-VDF175
F-200	RSFR-VT200
W-1-HL(2X,3X)	RSFR-(2X,3X)YG
W-1-H(RSFR-H)	RSFR-H(H)
W-1-PT	RSFR-H
W-1-HCB	RSFR-HCB(H)
W-1-PTCB	RSFR-HCB

A

[illegible]

Part No.	Item	Pages
SBRS-(2X)G	Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing	A01
SBRS-(3X)G	Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing	A03
SBRS-(4X)G	Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing	A05
SBRS-(2X)QF	Dual Wall Adhesive-Lined Heat-Shrink Tubing for Automotive Oil-pipe Protection	A07
SBRS-(3X,4X)GF	Dual Wall Adhesive Lined Cross -linked Polyolefin tubing	A09
SBRS-(3X)GLW	Flexible, Thick Adhesive-Lined Dual Wall Heat-Shrink Tubing	A11
SBRS-(3X)H	Halogen Free Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing	A13
SBRS-(4X)GR	High Shrink Ratio, Semi-rigid Dual Wall Adhesive-Lined Cross-Linked Polyolefin Tubing	A15
SBRS-(4X)GRF	Highly Flame Retardant Dual Wall Heat Shrink Polyolefin Tubing	A17
SBRS-(4X)GBK	Adhesive-Lined Cross-Linked Polyolefin Tubing	A19
SBRS-DZ	Heat Shrink Insulation Connectors	A21
SBRS-CAPS	Adhesive-Lined Insulating Caps	A23
SBRS-CAPS NF	Semi-rigid, Adhesive-Lined Insulating Caps	A25
SBRS-CAPS-RL	Semi-rigid, Adhesive-Lined Insulating Caps	A27
SBRSM	Flame Retardant Medium Wall Adhesive Lined Heat Shrink Tubing	A29
SBRSW	Flame Retardant Adhesive-Lined Heavy Wall Cross-linked Polyolefin Heat Shrink Tubing	A31
SBRSM-NF	Medium Wall Adhesive-lined Cross-linked Polyolefin Heat Shrink Tubing	A33
SBRSW-NF	Heavy Wall Adhesive-Lined Cross-linked Polyolefin Heat Shrink Tubing	A35
SBRSTV	Medium Wall Adhesive-lined Heat Variable Heat Shrink Tubing	A37
WF	PTFE Teflon tubing	A39
RSFR-TFE	Heat Shrink Teflon Tubing	A41
RSFR-DR	Diesel Resistant Flexible Elastomeric Heat Shrink Tubing	A43
RSFR-VDF175 (F-175)	THIN WALL PVDF Heat Shrink Tubing	A45
RSFR-VT200 (F-200)	Thin Wall Fluoroelastomer Heat Shrink Tubing	A47
SRG-N/W	Silicone Rubber Braided Tube	A49
WEPDM	Flexible EPDM Heat-Shrinkable Tubing	A51
WRSJD	Adhesive Lined Cross-Linked Polyolefin Heat Shrink Tape	A53
WPET	Expandable Sleeve	A55
WOLVO	Skidproof Heat Shrink Tubing	A57

SBRS-(2X)G

Dual Wall Adhesive-Lined
Heat-Shrink Polyolefin Tubing

Adhesive lined heat shrink tubing with environmental sealing capability for a wide variety of electrical applications, including automotive and marine wire harness, wire splices, breakouts, and connector-to-cable transitions.



RoHS



UL



US

2:1

Features

- 2:1 shrink ratio
- Superior sealing against water, moisture or other contaminants
- Inner adhesive bonds to plastics, steel and polyethylene
- Out jacket flame retardant
- Continuous operating temperature:-45℃-125℃
- Shrink Temperature:125℃

Dimensions

Size		As Supplied	After Recovery			Standard Package
Inch	mm	Internal Diameter mm	Internal Diameter mm	Total Wall Thickness mm	Adhesive Thickness mm	Spool Length M/spool
1/16	1.6	1.6	0.8	0.60 ± 0.15	0.30 ± 0.1	200
3/32	2.4	2.4	1.2	0.70 ± 0.15	0.35 ± 0.1	200
1/8	3.2	3.2	1.6	0.70 ± 0.15	0.35 ± 0.1	200
3/16	4.8	4.8	2.4	0.80 ± 0.15	0.40 ± 0.1	100
1/4	6.4	6.4	3.2	0.80 ± 0.15	0.40 ± 0.1	100
5/16	7.9	7.9	3.9	0.90 ± 0.15	0.45 ± 0.1	100
3/8	9.5	9.5	4.8	0.90 ± 0.15	0.45 ± 0.1	50
1/2	12.7	12.7	6.4	0.95 ± 0.20	0.45 ± 0.1	1.22 OR 25M/Roll
5/8	15.9	15.9	7.9	0.95 ± 0.20	0.45 ± 0.1	1.22 OR 25M/Roll
3/4	19.1	19.1	9.5	1.00 ± 0.20	0.45 ± 0.1	1.22 OR 25M/Roll
1	25.4	25.4	12.7	1.10 ± 0.20	0.50 ± 0.1	1.22 OR 25M/Roll
1 1/4	31.8	31.8	15	1.15 ± 0.20	0.50 ± 0.1	1.22 OR 25M/Roll
1 1/2	38.1	38.1	19	1.25 ± 0.20	0.50 ± 0.1	1.22 OR 25M/Roll
1 3/4	44.5	44.5	22	1.35 ± 0.20	0.55 ± 0.1	1.22 OR 25M/Roll
2	50.8	50.8	25.4	1.5 ± 0.25	0.60 ± 0.1	1.22 OR 25M/Roll

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dieletric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Hot Melt Adhesive Property

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2%
Sofening Point(℃)	ASTM E28	90 ± 5℃
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm

A01 Product Catalogue

www.woer.com A02

SBRS-(3X)G

Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing

Adhesive lined heat shrink tubing with environmental sealing capability for a wide variety of electrical applications, including automotive and marine wire harness, wire splices, breakouts, and connector-to-cable transitions.



Features

- 3:1 shrink ratio
- Low longitudinal shrinkage
- Flame retardant (out jacket only)
- Super sealing against water, moisture or other contaminates
- Continuous operating temperature:-45℃-125℃
- Shrink Temperature:125℃



Dimensions

Size		Expanded	After Recovery			Standard Package
Inch	mm	Internal Diameter mm	Internal Diameter mm	Total Wall Thickness mm	Adhesive Thickness mm	Spool Length M/spool
3/32	2.4	2,4	0.8	0.85 ± 0.15	0.40 ± 0.10	200
1/8	3.2	3,2	1.0	0.95 ± 0.15	0.40 ± 0.10	200
3/16	4.8	4,8	1.6	1.10 ± 0.15	0.40 ± 0.10	100
1/4	6.4	6,4	2.2	1.20 ± 0.15	0.45 ± 0.12	100
5/16	7.9	7,9	2.7	1.35 ± 0.15	0.50 ± 0.12	100
3/8	9.5	9,5	3.2	1.45 ± 0.20	0.50 ± 0.12	50
1/2	12.7	12,7	4.2	1.70 ± 0.20	0.50 ± 0.12	1.22 OR 25M/Roll
5/8	15	15	5.2	1.80 ± 0.20	0.55 ± 0.15	1.22 OR 25M/Roll
3/4	19.1	19,1	6.3	2.00 ± 0.20	0.55 ± 0.15	1.22 OR 25M/Roll
1	25.4	25,4	8.5	2.10 ± 0.25	0.55 ± 0.15	1.22 OR 25M/Roll
1-1/4	30	30	10.2	2.20 ± 0.25	0.60 ± 0.15	1.22 OR 25M/Roll
1-1/2	39	39	13.5	2.40 ± 0.25	0.60 ± 0.15	1.22 OR 25M/Roll
2	50	50	17	2.70 ± 0.25	0.70 ± 0.15	1.22 OR 25M/Roll
5/2	64	64	21	3.00 ± 0.30	0.70 ± 0.15	1.22 OR 25M/Roll
3	75	75	25	3.00 ± 0.30	1.00 ± 0.20	1.22 OR 25M/Roll
7/2	90	90	30	3.00 ± 0.30	1.00 ± 0.20	1.22 OR 25M/Roll
4	100	100	34	3.00 ± 0.30	1.00 ± 0.20	1.22 OR 25M/Roll
5	125	125	42	3.00 ± 0.30	1.00 ± 0.20	1.22 OR 25M/Roll

Technical Data

Property	Test Method	Stantard
Tensile Strengtn(MPa)	ASTM D2671	≥10.4
Elongation(%)	ASTM D2671	≥300
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3
Elongation after aging(%)	UL224 158℃X168hr	≥200
Flammability	ASTM D2671B	Self-extinguish within 30s
Dieletric strength(kv/mm)	IEC243	≥15
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴

Hot Melt Adhesive Property

Property	Test Method	Stantard
Water Absorption	ASTM D570	< 0.5 %
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	80N/25mm
Strength of pearing(AL)	ASTM D 1000	120N/25mm



SBRS-(4X)G

Dual Wall Adhesive-Lined Heat-Shrink Polyolefin Tubing

Adhesive lined heat shrink tubing with environmental sealing capability for a wide variety of electrical applications, including automotive and marine wire harness, wire splices, breakouts, and connector-to-cable transitions.



c US

4:1

Features

- 4:1 shrink ratio
- Low longitudinal shrinkage
- Superior sealing against water, moisture or other contaminants
- Ideal for connector sealing covering large diameter differences
- Inner adhesive bonds to plastics, steel and polyethylene
- Flame retardant(out jacket only)
- Continuous operating temperature:-45℃-125℃
- Shrink Temperature:125℃

Dimensions

Size		Expanded	After Recovery			Standard Package
Inch	mm	Internal Diameter mm	Internal Diameter mm	Total Wall Thickness mm	Adhesive Thickness mm	Spool Length M/spool
5/32	4.0	4,0	1.0	1.00 ± 0.15	0.40 ± 0.15	200
1/4	6.0	6,0	1.5	1.10 ± 0.15	0.40 ± 0.15	100
5/16	8.0	8,0	2.0	1.50 ± 0.15	0.50 ± 0.15	50
1/2	12.0	12,0	3.0	1.70 ± 0.15	0.50 ± 0.15	1.22 OR 25M/Roll
5/8	16.0	16,0	4.0	2.00 ± 0.15	0.60 ± 0.15	1.22 OR 25M/Roll
25/32	20.0	20,0	5.0	2.30 ± 0.25	0.60 ± 0.15	1.22 OR 25M/Roll
1	24.0	24,0	6.0	2.60 ± 0.25	0.60 ± 0.15	1.22 OR 25M/Roll
1-1/4	32.0	32,0	8.0	3.00 ± 0.30	0.70 ± 0.15	1.22 OR 25M/Roll
1-1/2	40.0	40,0	10.0	3.00 ± 0.30	0.70 ± 0.15	1.22 OR 25M/Roll
2	52.0	52,0	13.0	3.30 ± 0.30	0.70 ± 0.15	1.22 OR 25M/Roll

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Flammability	ASTM D2671B		Self-extinguish within 30s
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω.cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Hot Melt Adhesive Property

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2 %
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRS-(2X)QF

Dual Wall Adhesive-Lined
Heat-Shrink Tubing for Automotive Oil-pipe Protection

SBRS-(2X)QF Adhesive-lined Heat-shrinkable Tubing is specially designed for Automotive Oil-pipe Protection, providing preventive protection to break line, fuel line, hydraulic line and other metal pipeline which is subject to bending or clamping during manufacturing, installation or operation.



Features

- Semi-rigid outer jacket for mechanical damage prevention
- Adhesive inner layer for sealing against moisture and corrosion
- Easy installation
- High strength bonding, the adhesive layer is hard to be peeled off from pipeline
- Continuous operating temperature:-45℃-105℃
- Shrink Temperature:125℃

Dimensions

Size	Expanded	After Recovery			Standard Package
mm	Internal Diameter Min(mm)	Internal Diameter Max(mm)	Total Wall Thickness Nom(mm)	Adhesive Thickness Nom(mm)	Spool Length M/spool
Φ 4.5	5	3.2	1.20 ± 0.20	0.20 ± 0.10	300
Φ 6.0	6	4.5	1.20 ± 0.20	0.20 ± 0.10	300
Φ 8.0	8	6.1	1.30 ± 0.20	0.20 ± 0.10	200
Φ 11.0	11	7.1	1.30 ± 0.20	0.20 ± 0.10	200
Φ 13.0	13	9.8	1.30 ± 0.20	0.20 ± 0.10	100
Φ 15.0	15	11.5	1.30 ± 0.20	0.20 ± 0.10	100

Technical Data

Property	Test Method	Standart Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4
Elongation(%)	ASTM D2671	≥300
Longitudinal change	ASTM D2671	-5%~+5%
Tensile strength after aging(MPa)	120℃*24h	≥12
Non-deformability	140℃,10min,2kg/cm ² ,loaded 5min	≤60%
Low-temperature impact	ASTM D 746	-35℃,no cracking
Impact resistance to fall	Room temperature&-40℃*30min, impacted by a weight of 200g, 0.5m high	no cracking
Stress-crack resistance	ASTMD 1693	no cracking
Chemical reagents resistance: 0.1 mol/L H ₂ SO ₄ ,0.1 mol/L NaOH, Brake fluid, Engine oil, Gasoline	No abnormal in appearance	20℃,120hr

Adhesive

Property	Test Method	Standart
Water Absorption	ASTM D570	< 0.5%
Sofening Point(℃)	ASTM E28	105 ± 5℃
Strength of pearing(AL)	ASTM D 1000	120N/25mm
Strength of pearing(PE)	ASTM D 1000	80N/25mm



SBRS-(3X, 4X) GF

Dual Wall Adhesive Lined Cross -linked Polyolefin tubing

Adhesive lined heat shrink tubing ideal for applications where both exceptional flame retardancy and environmental sealing capabilities are required



Features

- 3:1&4:1 shrink ratio
- Highly flame retardant
- Superior sealing against water, moisture or other contaminants
- High shrink ratio allows for coverage of irregularly shaped connectors and components
- Superior sealing against water, moisture and other contaminants
- Continuous operating temperature:-55℃-135℃
- Shrink Temperature:125℃
- Meets MIL-DTL-23053/4

Dimensions

SBRS-(3X)GF

Size		Expanded	After Recovery			Standard Package
Inch	mm	Internal Diameter mm	Internal Diameter mm	Total Wall Thickness mm	Adhesive Thickness mm	Spool Length M/spool
1/8	3.2	3.2	1.0	0.95 ± 0.15	0.40 ± 0.10	200
3/16	4.8	4.8	1.6	1.10 ± 0.15	0.40 ± 0.10	100
1/4	5.4	5.4	2.2	1.20 ± 0.15	0.45 ± 0.10	100
5/16	7.9	7.9	2.7	1.35 ± 0.15	0.50 ± 0.10	100
3/8	9.5	9.5	3.2	1.45 ± 0.20	0.50 ± 0.10	50
1/2	12.7	12.7	4.2	1.70 ± 0.20	0.50 ± 0.15	1.22 OR 25M/Roll
5/8	15	15	5.2	1.80 ± 0.20	0.55 ± 0.15	1.22 OR 25M/Roll
3/4	19.1	19.1	6.3	2.00 ± 0.20	0.55 ± 0.20	1.22 OR 25M/Roll
1	25.4	25.4	8.5	2.10 ± 0.25	0.55 ± 0.20	1.22 OR 25M/Roll
1-1/4	30	30	10.2	2.20 ± 0.25	0.60 ± 0.20	1.22 OR 25M/Roll
1-1/2	39	39	13.5	2.40 ± 0.25	0.60 ± 0.20	1.22 OR 25M/Roll
2	50	50	17.0	2.70 ± 0.25	0.80 ± 0.20	1.22 OR 25M/Roll

SBRS-(4X)GF

Size		Expanded	After Recovery			Standard Package
Inch	mm	Internal Diameter mm	Internal Diameter mm	Total Wall Thickness mm	Adhesive Thickness mm	Spool Length M/spool
5/32	4.0	4.0	1.0	1.00 ± 0.15	0.40 ± 0.15	200
1/4	6.0	6.0	1.5	1.10 ± 0.15	0.40 ± 0.15	100
5/16	8.0	8.0	2.0	1.50 ± 0.15	0.50 ± 0.15	50
1/2	12.0	12.0	3.0	1.70 ± 0.15	0.50 ± 0.15	1.22 OR 25M/Roll
5/8	16.0	16.0	4.0	2.00 ± 0.15	0.60 ± 0.15	1.22 OR 25M/Roll
25/32	20.0	20.0	5.0	2.30 ± 0.25	0.60 ± 0.15	1.22 OR 25M/Roll
1	24.0	24.0	6.0	2.60 ± 0.25	0.60 ± 0.15	1.22 OR 25M/Roll
1-1/4	32.0	32.0	8.0	3.00 ± 0.30	0.70 ± 0.15	1.22 OR 25M/Roll
1-1/2	40.0	40.0	10.0	3.00 ± 0.30	0.70 ± 0.15	1.22 OR 25M/Roll
2	52.0	52.0	13.0	3.30 ± 0.30	0.70 ± 0.15	1.22 OR 25M/Roll

Technical Data

Property	Test Method	Standard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥12	12.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	MIL-DTL-23053/4	≥8.4	8.5
Elongation after aging(%)	MIL-DTL-23053/4	≥100	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Standard
Water Absorption	ASTM D570	≤0.2%
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm

SBRS-(3X)GLW

Flexible, Thick Adhesive-Lined Dual Wall Heat-Shrink Tubing

Flexible, Thick Adhesive-Lined Dual Wall Heat-Shrink Tubing is manufactured by co-extrusion of polyolefin and hot-melt adhesive. Designed to provide both insulation and sealing for protected articles, Used to protect bundles wires and metal tubes against water and moisture.



Features

- Low longitudinal shrinkage
- Thick adhesive liner bonding to a wide variety of plastics, rubber and metals forms an effective barrier against fluids and moisture,
- Flexible
- Continuous operating temperature:-45℃-125℃
- Min Shrink Temperature:110℃
- Shrink ratio: 3:1



Dimensions


Size		Expanded	After Recovery			Standard Package
Inch	mm	Internal Diameter mm	Internal Diameter mm	Total Wall Thickness mm	Adhesive Thickness mm	Spool Length M/spool
1/8	3.2	3.2	1.0	0.95 ± 0.15	0.45 ± 0.10	200
3/16	4.8	4.8	1.6	1.20 ± 0.15	0.60 ± 0.10	100
1/4	6.4	6.4	2.2	1.35 ± 0.15	0.70 ± 0.10	100
5/16	7.9	7.9	2.7	1.50 ± 0.15	0.75 ± 0.10	100
3/8	9.5	9.5	3.2	1.50 ± 0.15	0.75 ± 0.10	50
1/2	12.7	12.7	4.2	1.80 ± 0.20	0.90 ± 0.10	1.22 OR 25M/Roll
5/8	15.0	15.0	5.2	1.80 ± 0.20	0.90 ± 0.10	1.22 OR 25M/Roll
3/4	19.1	19.1	6.3	2.00 ± 0.20	1.00 ± 0.10	1.22 OR 25M/Roll
1	25.4	25.4	8.5	2.10 ± 0.20	1.05 ± 0.10	1.22 OR 25M/Roll
5/4	30.0	30.0	10.2	2.20 ± 0.20	1.05 ± 0.10	1.22 OR 25M/Roll
1-1/2	38.1	38.1	13.5	2.40 ± 0.20	1.15 ± 0.10	1.22 OR 25M/Roll

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2%
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm

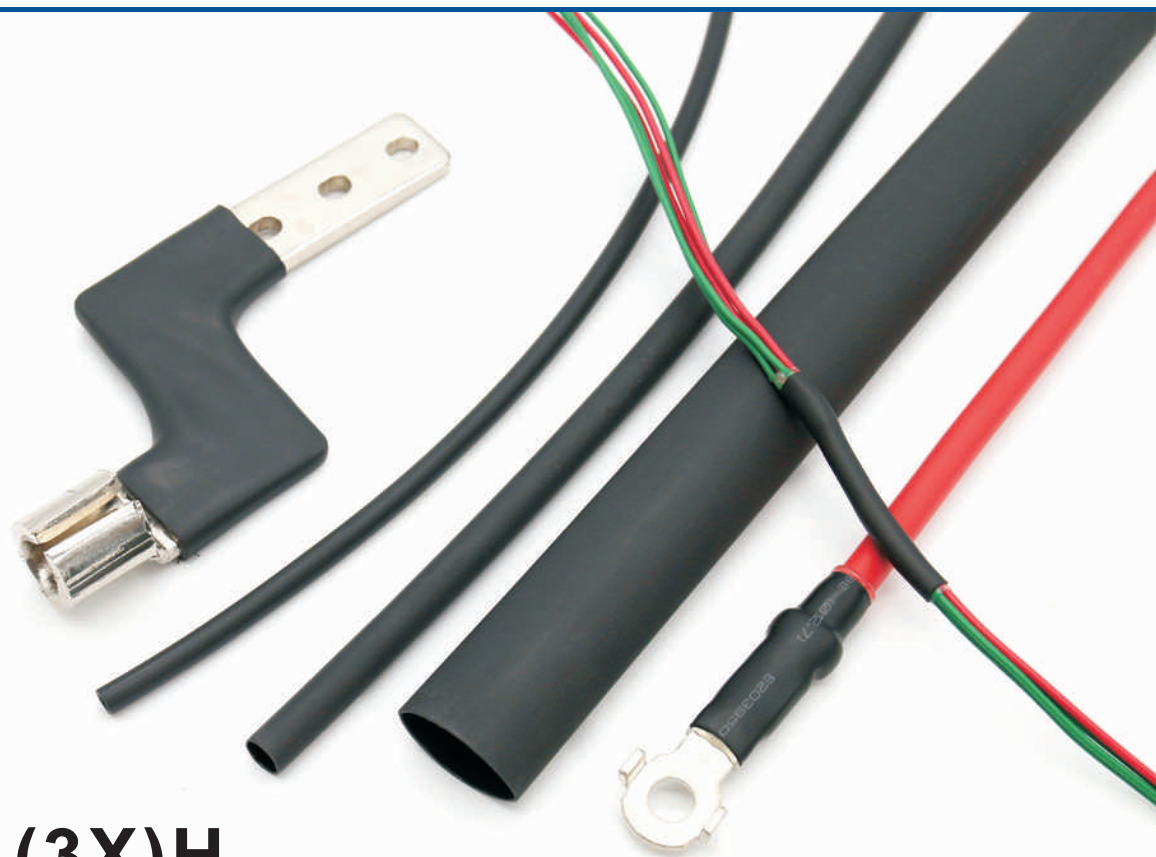

SBRS-(3X)H

Halogen Free Dual Wall Adhesive-Lined
Heat-Shrink Polyolefin Tubing

Adhesive lined heat shrink tubing with environmental sealing capability for a wide variety of electrical applications, including automotive and marine wire harness, wire splices, breakouts, and connector-to-cable transitions.



Features

- 3:1 shrink ratio
- Halogen free
- Super sealing against water, moisture or other contaminates
- Continuous operating temperature:-45℃-125℃
- Shrink Temperature:125℃
- Shrink ratio: 3:1
- Sony compliant

Dimensions


Size		Expanded	After Recovery			Standard Package
Inch	mm	Internal Diameter mm	Internal Diameter mm	Total Wall Thickness mm	Adhesive Thickness mm	Spool Length M/spool
3/32	2.4	2,4	0.8	0.85 ± 0.15	0.40 ± 0.10	200
1/8	3.2	3,2	1.0	0.95 ± 0.15	0.40 ± 0.10	200
3/16	4.8	4,8	1.6	1.10 ± 0.15	0.40 ± 0.10	100
1/4	6.4	6,4	2.2	1.20 ± 0.15	0.45 ± 0.12	100
5/16	7.9	7,9	2.7	1.35 ± 0.15	0.50 ± 0.12	100
3/8	9.5	9,5	3.2	1.45 ± 0.20	0.50 ± 0.12	50
1/2	12.7	12,7	4.2	1.70 ± 0.20	0.50 ± 0.12	1.22 OR 25M/Roll
5/8	15	15	5.2	1.80 ± 0.20	0.55 ± 0.15	1.22 OR 25M/Roll
3/4	19.1	19,1	6.3	2.00 ± 0.20	0.55 ± 0.15	1.22 OR 25M/Roll
1	25.4	25,4	8.5	2.10 ± 0.25	0.55 ± 0.15	1.22 OR 25M/Roll
1-1/4	30	30	10.2	2.20 ± 0.25	0.60 ± 0.15	1.22 OR 25M/Roll
1-1/2	39	39	13.5	2.40 ± 0.25	0.60 ± 0.15	1.22 OR 25M/Roll
2	50	50	17	2.70 ± 0.25	0.70 ± 0.15	1.22 OR 25M/Roll
5/2	64	64	21	3.00 ± 0.30	0.70 ± 0.15	1.22 OR 25M/Roll
3	75	75	25	3.00 ± 0.30	1.00 ± 0.20	1.22 OR 25M/Roll
7/2	90	90	30	3.00 ± 0.30	1.00 ± 0.20	1.22 OR 25M/Roll
4	100	100	34	3.00 ± 0.30	1.00 ± 0.20	1.22 OR 25M/Roll
5	125	125	42	3.00 ± 0.30	1.00 ± 0.20	1.22 OR 25M/Roll

Technical Data

Property	Test Method	Stantard
Tensile Strengtn(MPa)	ASTM D2671	≥10.4
Elongation(%)	ASTM D2671	≥300
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3
Elongation after aging(%)	UL224 158℃X168hr	≥200
Flammability	ASTM D2671B	Self-extinguish within 30s
Dielectric strength(kv/mm)	IEC243	≥15
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	< 0.5
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm

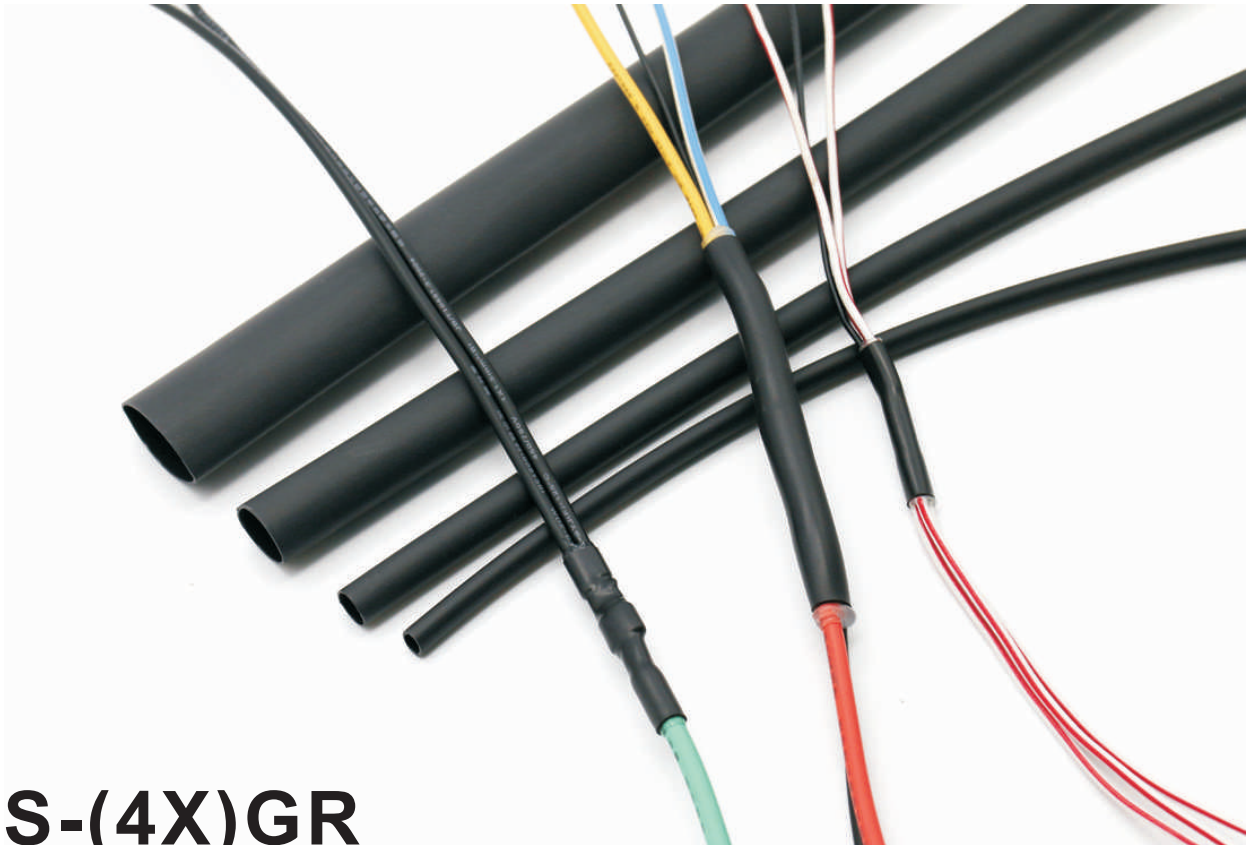

SBRS-(4X)GR

High Shrink Ratio, Semi-rigid Dual Wall
Adhesive-Lined Cross-Linked Polyolefin Tubing

Adhesive Semi-rigid, dual wall heat shrink tubing designed to seal&
environmentally protect splice in the most,



Features

- 4:1 shrink ratio
- Halogen free
- Super sealing against water, moisture or other contaminates
- Continuous operating temperature:-45℃-125℃
- Shrink Temperature:125℃
- Shrink ratio: 3:1
- Sony compliant

Dimensions

Size		Expanded	After Recovery			Standard Package
Inch	mm	Internal Diameter Min(mm)	Internal Diameter Max(mm)	Total Wall Thickness Nom(mm)	Adhesive Thickness Nom(mm)	Spool Length M/spool
5/32	4	4,0	0.95	1.40 ± 0.20	0.50 ± 0.10	200
1/4	6	6,0	1.27	1.70 ± 0.20	0.60 ± 0.10	100
5/16	8	8,0	1.65	2.00 ± 0.20	0.75 ± 0.10	100
1/ 2	12	12,0	2.41	2.45 ± 0.20	1.20 ± 0.20	1.22 OR 25M/Roll
3/4	18	18,0	4.45	2.60 ± 0.20	1.40 ± 0.20	1.22 OR 25M/Roll

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2%
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRS-(4X)GRF

Highly Flame Retardant
Dual Wall Heat Shrink Polyolefin Tubing

Highly flame retardant, semi-rigid, cross-linked dual wall heat-shrink tubing designed for splice sealing and fuse link protection



Features

- 3:1&4:1 shrink ratio to cover varying splice configurations and substrate profiles
- Jacket and adhesive are exceptionally flame retardant
- Economical way to environmentally seal and protect automotive fuse-links, splice and terminals
- Highly resistance to common automotive fluids and solvents
- Semi-rigid and mechanically tough outer jacket provides added strain relief and excellent abrasion protection
- Thick adhesive liner forms an effective barrier against fluids and moisture penetration
- Continuous operating temperature:-45℃-125℃
- Shrink Temperature:125℃

Dimensions

Size		Expanded	After Recovery			Standard Package
Inch	mm	Internal Diameter Min(mm)	Internal Diameter Max(mm)	Total Wall Thickness Nom(mm)	Adhesive Thickness Nom(mm)	Spool Length M/spool
5/32	4	4,0	0.95	1.40 ± 0.20	0.50 ± 0.10	200
1/4	6	6,0	1.27	1.70 ± 0.20	0.60 ± 0.10	100
5/16	8	8,0	1.65	2.00 ± 0.20	0.75 ± 0.10	100
1/ 2	12	12,0	2.41	2.45 ± 0.20	1.20 ± 0.20	1.22 OR 25M/Roll
3/4	18	18,0	4.45	2.60 ± 0.20	1.40 ± 0.20	1.22 OR 25M/Roll

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2 %
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



Dimensions

Size		Expanded	After Recovery			Standard Package
Inch	mm	Internal Diameter Min(mm)	Internal Diameter Max(mm)	Total Wall Thickness Nom(mm)	Adhesive Thickness Nom(mm)	Spool Length M/spool
5/32	4	4.0	0.95	1.40 ± 0.20	0.50 ± 0.20	200
1/4	6	6.0	1.27	1.70 ± 0.20	0.60 ± 0.20	100
5/16	8	8.0	1.65	2.00 ± 0.20	0.75 ± 0.20	100
2/5	10	10.0	2.00	2.20 ± 0.20	0.90 ± 0.20	1.22 OR 25M/Roll
1/ 2	12	12.0	2.41	2.45 ± 0.20	1.20 ± 0.20	1.22 OR 25M/Roll
3/4	18	18.0	4.45	2.60 ± 0.20	1.40 ± 0.20	1.22 OR 25M/Roll

SBRS-(4X)GBK


Adhesive-Lined Cross-Linked Polyolefin Tubing

Adhesive lined heat shrink specifically designed to insulate, seal and protect in-line splices in automotive wire harnesses and electronic assemblies



Features

- 4:1 shrink ratio allows for fewer sizes to cover numerous splice configurations and diameters.
- Seals and protects against water, moisture and chemicals
- Adhesive bonds readily to PVC, XLPE and PP-EPDM cable jackets
- Shrinks rapidly for quick installation
- Continuous operating temperature:-45℃-125℃
- Initial shrinkage temperature:70℃
- Shrink Temperature:110℃
- Black and clear

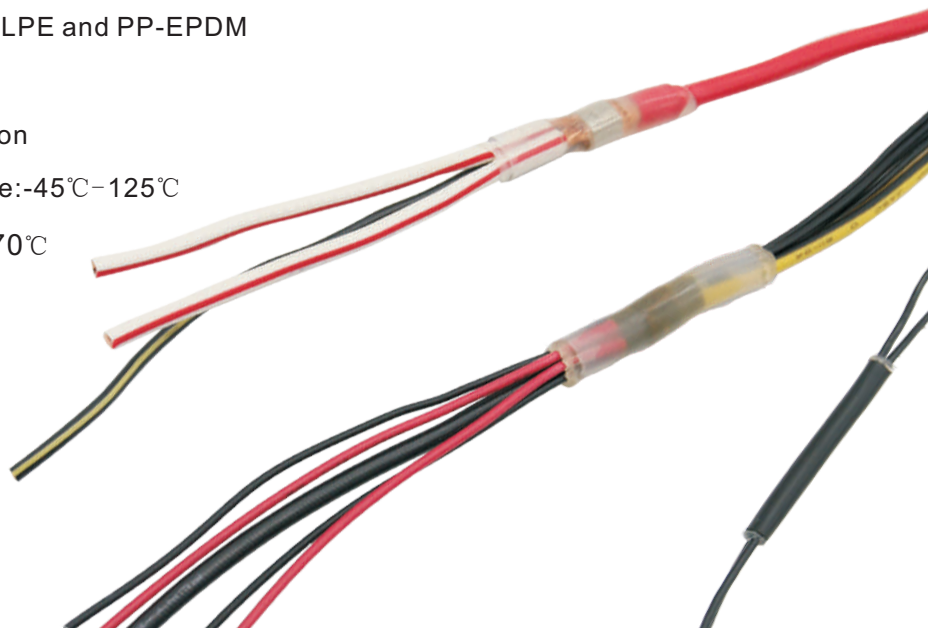

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dieletric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2 %
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRS- DZ

Heat Shrink Insulation Connectors

Crystal clear, semi-rigid, adhesive lined tubing with
integral solderless splice connector



Features

- Exceptional clarity for visual confirmation of seal
- Seal& protects against water, corrosive compounds, moisture& contaminants
- Tough, durable heat shrink tubing resists abrasion, crimp tool damage& splitting
- Shrinks 40% faster than nylon, preventing.
- Inner adhesive bonds to plastics, rubbers & metals
- Meets& conforms to OEM wiring specifications for installation& repairs
- Continuous operating temperature:-45℃-125℃
- Minimum shrinking temperature: 90℃

Dimensions

Code	Size		Tube Diameter			Color	Standard Package
	AWG	mm ²	Expanded Min(mm)	Recovered Max(mm)	Length (mm)		
SBRS-DZ-1	22-18	0.5-1.0	4.8	1.2	35.0	red	1000pc/bag
SBRS-DZ-2	16-14	1.5-2.5	5.5	1.4	35.0	blue	1000pc/bag
SBRS-DZ-3	12-10	4.0-6.0	6.5	1.5	42.0	yellow	500pc/bag

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥14	16
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	15
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω.cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2 %
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRS- CAPS

Adhesive-Lined Insulating Caps

Adhesive lined, heat shrink insulating caps specifically designed to insulate, seal and protect end or stub splices in wiring harness and electronic assemblies



4:1

Features

- 4:1 shrink ratio allows fewer sizes to cover a wide range of profiles
- Seals and protects against water, moisture and chemical
- Adhesive bonds readily to PVC, XLPE and PP-EPDM cable jackets
- Shrinks rapidly for quick installation
- Continuous operating temperature:-45℃-125℃
- Minimum shrinking temperature: 125℃

Dimensions

Code	Size (mm)	Standard Length(mm)		Expanded Internal Diameter Min(mm)	Recoverd			
		A	B		Internal Diameter Max(mm)	Outer Layer Thickness (mm)	Adhesive Thickness (mm)	Total Wall Thickness (mm)
CAPS-1	3.2	22	12.7	3.2	0.80	0.64	0.56	1.20
CAPS-2	4.8	25.4	15.2	4.8	1.30	0.76	0.76	1.52
CAPS-3	6.4	28.4	15.2	6.4	1.52	1.00	0.91	1.91
CAPS-4	9.5	31.8	18.3	9.5	2.00	1.08	1.00	2.08
CAPS-5	12.7	38.1	21.6	12.7	2.41	1.30	1.24	2.54

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2%
Sofening Point(℃)	ASTM E28	90±5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRS- CAPS NF

Semi-rigid, Adhesive-Lined Insulating Caps

Semi-rigid, adhesive lined, heat shrink insulating caps specifically designed to insulate, seal and protect end or stub splices under extreme operating conditions



4:1

Features

- 4:1 shrink ratio allows fewer sizes to cover a wide range of profiles
- Seals and protects against water, moisture and chemical
- Adhesive bonds readily to PVC, XLPE and PP-EPDM cable jackets
- Shrinks rapidly for quick installation
- Continuous operating temperature:-45℃-125℃
- Shrinking temperature: 125℃
- Not flame-retardant

Dimensions

Code	Size (mm)	Standard Length (mm)	Expanded	Recoverd			
			Internal Diameter Min(mm)	Internal Diameter Max(mm)	Outer Layer Thickness (mm)	Adhesive Thickness (mm)	Total Wall Thickness (mm)
CAPS NF-1	3.2	22	3.2	0.80	0.64	0.56	1.20
CAPS NF-2	4.8	25.4	4.8	1.30	0.76	0.76	1.52
CAPS NF-3	6.4	28.4	6.4	1.52	1.00	0.91	19.10
CAPS NF-4	9.5	31.8	9.5	2.00	1.08	1.00	2.08
CAPS NF-5	12.7	38.1	12.7	2.41	1.30	1.24	2.54

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃CX168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃CX168hr	≥200	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2 %
Sofening Point(℃)	ASTM E28	90±5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRS-CAPS-RL

Semi-rigid, Adhesive-Lined Insulating Caps

Heat shrink end caps are a simple yet effective method for sealing cable ends, pipe, conduit or other similar objects

Typical Applications Watertight sealing of cable ends and pipe conduit
Standards Rated for 600/1000V



Features

- 3:1 shrink ratio
- Resistant to common fluids and solvents
- Superior resistance to weathering ,moisture contamination and adverse environmental conditions
- Standard adhesive liner provides complete environmental protection and insulation
- Heat indicating lines
- Resistant to common fluids and solvents
- Coated hot melt adhesive resists pull-off
- Shrink temperature :120℃
- Continuous operating temperature: -55℃ to 110℃

Dimensions

Expanded Length (Nom)		Expanded		Recoverd				General Use Diameter		Cable Range
		InternalDiameter Min		InternalDiameter Max-d		Wall Thickness Nom-W				
mm	IN	mm	IN	mm	IN	mm	IN	mm	IN	AWG/MCM
50.80	2.00	10.20	0.40	3.80	0.15	2.00	0.080	4.5–8.5	0.18–0.34	#8–#1
63.50	2.50	19.10	0.75	5.60	0.22	2.00	0.080	6–16.5	0.24–0.65	#2–4/0
76.20	3.00	27.90	1.10	10.20	0.40	2.40	0.095	11.5–25	0.45–1	2/0–500
76.20	3.00	33.00	1.30	10.20	0.40	2.40	0.095	11.5–30	0.45–1.2	300–1000
88.90	3.50	38.10	1.50	12.70	0.50	2.40	0.095	14–35	0.55–1.4	500–1500
88.90	3.50	43.20	1.70	12.70	0.50	2.50	0.100	14–40	0.55–1.6	650–1750
88.90	3.50	52.10	2.05	19.00	0.75	2.50	0.100	21–45	0.82–1.8	900–2500
101.60	4.00	69.80	2.75	25.40	1.00	2.50	0.100	30–63	1.2–2.5	2000–2500
114.30	4.50	88.90	3.50	30.00	1.18	2.50	0.100	33–83.8	1.3–3.3	—
139.70	5.50	119.40	4.70	39.90	1.57	2.70	0.105	40.6–114.3	1.6–4.5	—

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dieletric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2%
Sofening Point(℃)	ASTM E28	90±5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRSM

Flame Retardant Medium Wall Adhesive Lined Heat Shrink Tubing

Medium wall adhesive-lined heat Shrink tubing suitable for a variety of low voltage electrical and mechanical application, where lighter weight and greater flexibility are important



Features

- Seals and protects cable splices and terminations
- High resistance to impact and abrasion
- Thermoplastic adhesive liner for complete environmental protection and insulation
- Continuous operating temperature:-45℃-125℃
- Shrinking temperature: 125℃

Dimensions

Size	Expanded	After Recovery				Standard Package
mm	Internal Diameter mm	Internal Diameter mm	Jacket Thickness mm	Adhesive Thickness mm	Total Wall Thickness mm	M/pc
10.2/3.0	10.2	3.0	1.35 ± 0.20	0.50 ± 0.15	1.85 ± 0.25	1.22
16.0/5.0	16.0	5.0	1.40 ± 0.20	0.60 ± 0.15	2.00 ± 0.25	1.22
19.1/5.6	19.1	5.6	1.70 ± 0.20	0.70 ± 0.15	2.40 ± 0.25	1.22
25.0/8.0	25.0	8.0	2.00 ± 0.20	0.70 ± 0.15	2.70 ± 0.25	1.22
28.0/9.0	28.0	9.0	2.00 ± 0.20	0.80 ± 0.20	2.80 ± 0.25	1.22
35.0/10.2	35.0	10.2	2.00 ± 0.20	0.80 ± 0.20	2.80 ± 0.25	1.22
38.1/12.0	38.1	12.0	2.00 ± 0.20	0.80 ± 0.20	2.80 ± 0.25	1.22
43.2/12.7	43.2	12.7	2.10 ± 0.25	0.80 ± 0.20	2.90 ± 0.25	1.22
52.1/16.0	55.0	19.0	2.10 ± 0.25	0.80 ± 0.20	2.90 ± 0.25	1.22
63.0/19.0	63.0	22.0	2.20 ± 0.25	0.80 ± 0.20	3.00 ± 0.25	1.22
75.0/22.0	75.0	25.0	2.90 ± 0.25	0.80 ± 0.20	3.70 ± 0.25	1.22
85.0/25.0	85.0	25.0	2.90 ± 0.25	0.80 ± 0.20	3.70 ± 0.30	1.22
95.0/29.0	95.0	29.0	3.10 ± 0.30	0.80 ± 0.20	3.90 ± 0.30	1.22
115.0/34.0	115.0	34.0	3.10 ± 0.30	0.80 ± 0.20	3.90 ± 0.30	1.22
140.0/42.0	140.0	42.0	3.30 ± 0.30	0.80 ± 0.20	4.10 ± 0.30	1.22
160.0/48.0	160.0	48.0	3.30 ± 0.30	0.80 ± 0.20	4.10 ± 0.30	1.22
180.0/58.0	180.0	58.0	3.30 ± 0.30	0.80 ± 0.20	4.10 ± 0.30	1.00
200.0/60.0	200.0	60.0	3.30 ± 0.30	0.80 ± 0.20	4.10 ± 0.30	1.00
230.0/69.0	230.0	69.0	3.30 ± 0.30	0.80 ± 0.20	4.10 ± 0.30	1.00

Note: Tubing without adhesive is available upon request

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2 %
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRSW

Flame Retardant Adhesive-Lined Heavy Wall Cross-linked Polyolefin Heat Shrink Tubing

Adhesive-lined heavy wall heat shrink tubing insulates and protects electrical splice and terminations where maximum flame retardancy and exceptional insulating and sealing characteristics are required



Features

- 3:1 shrink ratio
- Flame retardant
- SBRSW tubing will not split or rupture during installation, when overheated
- Thermoplastic adhesive liner for complete environmental protection and insulation
- Continuous operating temperature:-45℃-125℃
- Shrinking temperature: 125℃

Dimensions

Size	Expanded	After Recovery				Standard Package M/pc
mm	Internal Diameter mm	Internal Diameter mm	Jacket Thickness mm	Adhesive Thickness mm	Total Wall Thickness mm	
9.0/3.0	9,0	3.0	2.00 ± 0.20	0.45 ± 0.10	2.45 ± 0.25	1.22
13.0/4.0	13,0	4.0	2.30 ± 0.20	0.45 ± 0.10	2.75 ± 0.25	1.22
28.0/9.0	28,0	9.0	2.30 ± 0.20	0.70 ± 0.10	3.00 ± 0.25	1.22
33.0/10.2	33,0	10.2	2.90 ± 0.20	0.70 ± 0.10	3.60 ± 0.25	1.22
38.1/12.0	38,1	12.0	3.10 ± 0.20	0.70 ± 0.15	3.80 ± 0.30	1.22
43.2/12.7	43,2	12.7	3.40 ± 0.20	0.70 ± 0.20	4.10 ± 0.35	1.22
51.0/16.0	51,0	16.0	3.40 ± 0.20	0.70 ± 0.20	4.10 ± 0.35	1.22
70.0/21.0	70,0	21.0	3.60 ± 0.20	0.80 ± 0.20	4.40 ± 0.35	1.22
85.0/25.0	85,0	25.0	3.60 ± 0.20	0.80 ± 0.20	4.40 ± 0.35	1.22
105.0/30.0	105,0	30.0	3.80 ± 0.20	0.80 ± 0.20	4.60 ± 0.35	1.22
120.0/39.0	120,0	39.0	3.80 ± 0.20	0.80 ± 0.20	4.60 ± 0.35	1.22
140.0/42.0	140,0	42.0	3.80 ± 0.20	0.80 ± 0.20	4.60 ± 0.35	1.22

Note: Tubing without adhesive is available upon request

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2 %
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRSM-NF

Medium Wall Adhesive-lined Cross-linked Polyolefin Heat Shrink Tubing

Medium wall heat shrinkable tubing suitable for a variety of low voltage electrical and mechanical application, where lighter weight and greater flexibility are important



Features

- 3:1 shrink ratio, not Flame-retardant
- Seal and protect cable splice and terminations
- Rugged mechanical protection
- Complete moisture sealing
- Strain relief for delicate wire connections
- High resistance to impact and abrasion
- Thermoplastic adhesive liner for complete environmental protection and insulation
- Continuous operating temperature:-45℃-125℃
- Shrinking temperature: 125℃
- RoHS compliant

Dimensions

Size	Expanded	After Recovery				Standard Package
mm	Internal Diameter mm	Internal Diameter mm	Jacket Thickness mm	Adhesive Thickness mm	Total Wall Thickness mm	M/pc
6.0/2.0	6.0	2.0	1.40 ± 0.20	0.45 ± 0.10	1.85 ± 0.25	1.22
8.0/2.0	8.0	2.0	1.40 ± 0.20	0.45 ± 0.10	1.85 ± 0.25	1.22
10.2/3.0	10.2	3.0	1.40 ± 0.20	0.50 ± 0.10	1.90 ± 0.25	1.22
12.0/3.0	12.0	3.0	1.40 ± 0.20	0.50 ± 0.10	1.90 ± 0.25	1.22
16.0/5.0	16.0	5.0	1.50 ± 0.20	0.55 ± 0.15	2.15 ± 0.30	1.22
19.1/5.6	19.1	5.6	1.80 ± 0.20	0.60 ± 0.15	2.40 ± 0.30	1.22
22.0/6.0	22.0	6.0	2.00 ± 0.30	0.60 ± 0.15	2.60 ± 0.30	1.22
25.0/8.0	25.0	8.0	2.00 ± 0.30	0.60 ± 0.15	2.70 ± 0.30	1.22
28.0/6.0	28.0	6.0	2.40 ± 0.30	0.95 ± 0.20	3.30 ± 0.35	1.22
33.0/8.0	33.0	8.0	2.50 ± 0.30	0.80 ± 0.15	3.30 ± 0.35	1.22
38.1/12.0	38.1	12.0	2.40 ± 0.30	0.80 ± 0.15	3.30 ± 0.35	1.22
43.2/12.7	43.2	12.7	2.50 ± 0.30	0.80 ± 0.15	3.30 ± 0.35	1.22
55.0/16.0	55.0	16.0	2.50 ± 0.30	0.80 ± 0.15	3.30 ± 0.35	1.22
65.0/19.0	65.0	19.0	2.50 ± 0.30	0.80 ± 0.15	3.30 ± 0.35	1.22
75.0/22.0	75.0	22.0	2.90 ± 0.30	0.80 ± 0.15	3.70 ± 0.40	1.22
85.0/25.0	85.0	25.0	2.90 ± 0.30	0.80 ± 0.15	3.70 ± 0.40	1.22
95.0/30.0	95.0	30.0	3.00 ± 0.30	0.80 ± 0.15	3.80 ± 0.40	1.22
115.0/34.0	115.0	34.0	3.00 ± 0.30	0.80 ± 0.15	3.80 ± 0.40	1.22
140.0/42.0	140.0	42.0	3.00 ± 0.30	0.80 ± 0.15	3.80 ± 0.40	1.22
160.0/50.0	160.0	50.0	3.10 ± 0.30	0.80 ± 0.15	3.90 ± 0.40	1.22
180.0/65.0	180.0	65.0	3.10 ± 0.30	0.80 ± 0.15	3.90 ± 0.40	1.00
200.0/69.0	200.0	69.0	3.10 ± 0.30	0.80 ± 0.15	3.90 ± 0.40	1.00
230.0/78.0	230.0	78.0	3.10 ± 0.30	0.80 ± 0.15	3.90 ± 0.40	1.00

Note: Tubing without adhesive is available upon request

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥14	15
Elongation(%)	ASTM D2671	≥400	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥12	12.5
Elongation after aging(%)	UL224 158℃X168hr	≥300	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω.cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2 %
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRSW-NF

Heavy Wall Adhesive-Lined Cross-linked Polyolefin Heat Shrink Tubing

Heavy wall adhesive-lined heat shrink tubing provides maximum reliability for insulating and protecting cable joints and terminations



Features

- 3: 1 shrink ratio, not flame-retardant
- Withstands severe mechanical requirements of U.R.D., submersible and direct burial installations
- High impact, abrasion, corrosion and chemical resistance
- Rated for 1kv, 90℃ application
- Thermoplastic adhesive liner provides complete environmental protection and installation
- Continuous operating temperature: -45℃-125℃
- Shrinking temperature: 125℃

Dimensions

Size	Expanded	After Recovery				Standard Package
mm	Internal Diameter mm	Internal Diameter mm	Jacket Thickness mm	Adhesive Thickness mm	Total Wall Thickness mm	M/pc
8.0/2.0	8,0	2.0	1.80 ± 0.20	0.55 ± 0.10	2.35 ± 0.25	1.22
9.0/3.0	9,0	3.0	2.00 ± 0.20	0.55 ± 0.10	2.55 ± 0.25	1.22
13.0/4.0	13,0	4.0	2.30 ± 0.20	0.55 ± 0.10	2.85 ± 0.25	1.22
16.0/5.0	16,0	5.0	2.30 ± 0.20	0.60 ± 0.10	2.90 ± 0.25	1.22
22.0/6.0	22,0	6.0	2.50 ± 0.20	0.60 ± 0.15	3.10 ± 0.30	1.22
28.0/6.0	28,0	6.0	2.70 ± 0.20	0.70 ± 0.20	3.40 ± 0.35	1.22
33.0/8.0	33,0	8.0	2.80 ± 0.30	0.80 ± 0.15	3.60 ± 0.35	1.22
38.1/12.0	38,1	12.0	3.10 ± 0.30	0.80 ± 0.15	3.90 ± 0.35	1.22
43.2/12.0	43,2	12.0	3.50 ± 0.30	0.80 ± 0.15	4.30 ± 0.40	1.22
55.0/16.0	55,0	16.0	3.60 ± 0.30	0.80 ± 0.15	4.40 ± 0.40	1.22
65.0/19.0	65,0	19.0	3.60 ± 0.30	0.80 ± 0.15	4.30 ± 0.40	1.22
75.0/22.0	75,0	22.0	3.60 ± 0.30	0.80 ± 0.15	4.30 ± 0.40	1.22
85.0/25.0	85,0	25.0	3.60 ± 0.30	0.80 ± 0.15	4.30 ± 0.40	1.22
95.0/30.0	95,0	30.0	3.60 ± 0.30	0.80 ± 0.15	4.30 ± 0.40	1.22
105.0/30.0	105,0	30.0	3.80 ± 0.30	0.80 ± 0.15	4.60 ± 0.40	1.22
120.0/39.0	120,0	39.0	3.80 ± 0.30	0.80 ± 0.15	4.30 ± 0.40	1.22
140.0/42.0	140,0	42.0	3.80 ± 0.30	0.80 ± 0.15	4.30 ± 0.40	1.22
160.0/50.0	160,0	50.0	3.80 ± 0.30	0.80 ± 0.15	4.30 ± 0.40	1.22
180.0/60.0	180,0	60.0	3.80 ± 0.30	0.80 ± 0.15	4.30 ± 0.40	1.00
200.0/69.0	200,0	69.0	3.80 ± 0.30	0.80 ± 0.15	4.30 ± 0.40	1.00
230.0/78.0	230,0	78.0	4.10 ± 0.30	0.80 ± 0.15	4.90 ± 0.40	1.00

Note: Tubing without adhesive is available upon request

Technical Data

Property	Test Method	Standard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥14	15
Elongation(%)	ASTM D2671	≥400	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥12	12.5
Elongation after aging(%)	UL224 158℃X168hr	≥300	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Standard
Water Absorption	ASTM D570	≤0.2 %
Sofening Point(℃)	ASTM E28	90 ± 5
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



SBRSTV

Medium Wall Adhesive-lined Heat Variable Heat Shrink Tubing

Heat shrinkable tubing and adhesive liner combination that established the CATV industry standard for splice and connector protection



Features

- 3: 1 shrink ratio
- Flame retardant
- Excellent resistance to weathering , moisture contamination and adverse environmental conditions
- Heat indicating lines
- Adhesive liner provides complete environmental protection and insulation
- Resists common fluids and solvents
- Continuous operating temperature:-45℃-110℃
- Shrinking temperature: 125℃

Dimensions


Size mm	Expanded	After Recovery				Standard Package M/pc
	Internal Diameter mm	Internal Diameter mm	Jacket Thickness mm	Adhesive Thickness mm	Total Wall Thickness mm	
10.2/3.8	10.2	3.8	1.40 ± 0.20	0.50 ± 0.10	1.90 ± 0.25	1.22
19.0/5.6	19.0	5.6	1.80 ± 0.20	0.60 ± 0.15	2.40 ± 0.30	1.22
28.0/6.0	28.0	6.0	2.40 ± 0.30	0.95 ± 0.20	3.30 ± 0.35	1.22
33.0/8.0	33.0	8.0	2.50 ± 0.30	0.80 ± 0.15	3.30 ± 0.35	1.22
38.1/12.0	38.1	12.0	2.40 ± 0.30	0.80 ± 0.15	3.30 ± 0.35	1.22
43.2/12.7	43.2	12.7	2.40 ± 0.30	0.80 ± 0.15	3.30 ± 0.35	1.22
55.0/16.0	55.0	16.0	2.40 ± 0.30	0.80 ± 0.15	3.30 ± 0.35	1.22
70.0/25.4	70.0	25.4	2.80 ± 0.30	0.60 ± 0.15	3.40 ± 0.40	1.22

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥300	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	350
Dieletric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤0.2%
Sofening Point(℃)	ASTM E28	95
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm

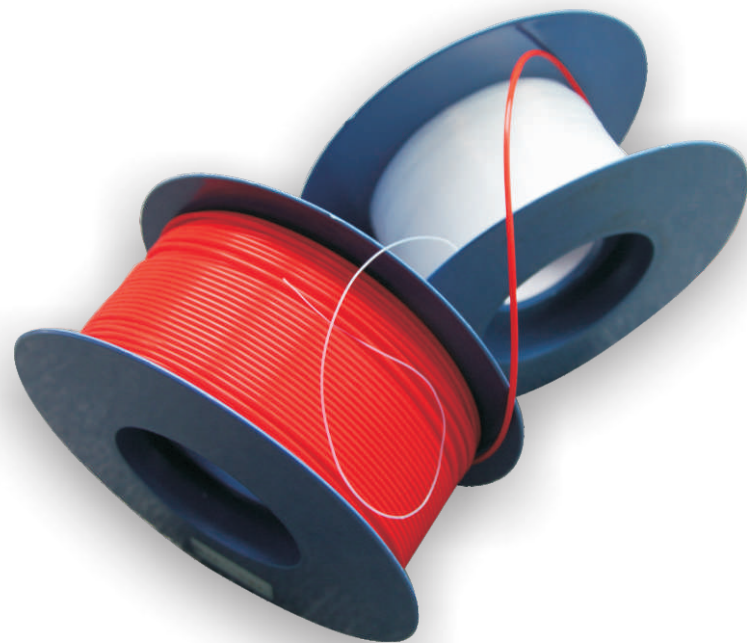

WF

PTFE Teflon tubing

Specially designed for protecting applications in extreme electrical
Chemical and thermal environment



Features

- Chemical insert
- High temperature resistance
- Continuous operating
- Temperature:-80℃-200℃
- Corrosion resistance(acid/alkali resistance,
chemical reagents oil-proof)
- High pressure resistance
- Standard: UL224 VW-1 C-UL CSA22.20FT
- UL file number: E203950

Dimensions

Size AWG	Expanded	External Diameter			Standard Package M/Spool
	Internal Diameter mm	(S)	(T)	(L)	
30	0.30 ± 0.10	0.80 ± 0.10	0.70 ± 0.10	0.60 ± 0.10	305
28	0.38 ± 0.10	0.88 ± 0.10	0.78 ± 0.10	0.68 ± 0.10	305
26	0.46 ± 0.10	0.96 ± 0.10	0.86 ± 0.10	0.76 ± 0.10	305
24	0.56 ± 0.10	1.16 ± 0.10	1.06 ± 0.10	0.86 ± 0.10	305
23	0.66 ± 0.10	1.26 ± 0.10	1.16 ± 0.10	0.96 ± 0.10	305
22	0.71 ± 0.10	1.31 ± 0.10	1.21 ± 0.10	1.01 ± 0.10	305
21	0.81 ± 0.10	1.41 ± 0.10	1.31 ± 0.10	1.11 ± 0.10	305
20	0.86 ± 0.10	1.66 ± 0.10	1.46 ± 0.10	1.16 ± 0.10	305
19	0.96 ± 0.20	1.76 ± 0.20	1.56 ± 0.20	1.26 ± 0.20	200
18	1.07 ± 0.20	1.87 ± 0.20	1.67 ± 0.20	1.37 ± 0.20	200
17	1.19 ± 0.20	1.99 ± 0.20	1.79 ± 0.20	1.49 ± 0.20	200
16	1.34 ± 0.20	2.14 ± 0.20	1.94 ± 0.20	1.64 ± 0.20	153
15	1.50 ± 0.20	2.30 ± 0.20	2.10 ± 0.20	1.80 ± 0.20	153
14	1.68 ± 0.20	2.48 ± 0.20	2.28 ± 0.20	2.08 ± 0.20	100
13	1.93 ± 0.20	2.73 ± 0.20	2.53 ± 0.20	2.33 ± 0.20	100
12	2.16 ± 0.25	2.96 ± 0.25	2.76 ± 0.25	2.56 ± 0.25	100
11	2.41 ± 0.25	3.21 ± 0.25	3.01 ± 0.25	2.81 ± 0.25	150
10	2.86 ± 0.25	3.49 ± 0.25	3.29 ± 0.25	3.09 ± 0.25	150
9	3.00 ± 0.25	4.00 ± 0.25	3.80 ± 0.25	3.40 ± 0.25	150
8	3.38 ± 0.25	4.38 ± 0.25	4.18 ± 0.25	3.78 ± 0.25	100
7	3.76 ± 0.25	4.76 ± 0.25	4.56 ± 0.25	4.16 ± 0.25	100
6	4.22 ± 0.25	5.22 ± 0.25	5.02 ± 0.25	4.80 ± 0.25	100
5	4.72 ± 0.25	5.72 ± 0.25	5.52 ± 0.25	5.32 ± 0.25	50
4	5.28 ± 0.30	6.28 ± 0.30	6.08 ± 0.30	5.88 ± 0.25	50
3	5.94 ± 0.30	6.94 ± 0.30	6.74 ± 0.30	6.54 ± 0.25	1.00
2	6.68 ± 0.30	7.68 ± 0.30	7.48 ± 0.30	7.28 ± 0.25	1.00
1	7.46 ± 0.30	8.46 ± 0.30	8.26 ± 0.30	8.06 ± 0.25	1.00
0	8.38 ± 0.30	9.38 ± 0.30	9.18 ± 0.30	8.98 ± 0.25	1.00

Technical Data

Property	Method Test	Stantard
Tensile Strengtn(MPa)	ASTMD 2671	≥25
Elongation(%)	ASTMD 2671	≥300
Flammablity	VW-1	Pass
Dieletric strength(kv/mm)	IEC 60243	≥26
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ¹⁴



RSFR-TFE

Heat Shrink Teflon Tubing

Heat Shrink Teflon Tubing can be widely used in science & technology field, such as chemistry, mechanical industries, astronautic industry, vehicles, transformers, communications, etc



1.7:1

Features

- High performance for anti-corrosion (anti-acid/alkali/chemical/oil)
- High voltage resistant
- Operating Temperature: -65℃-200℃
- Standard color: Clear
- Shrink ratio:1.7:1, shrink temperature:>350℃



Dimensions

Size (mm)	Expanded		Recovered		Standard Package	Round/Flat
	Internal Diameter (mm)	Wall Thickness (mm)	Internal Diameter (mm)	Wall Thickness (mm)		
1.0	1.0 ± 0.2	0.12 ± 0.05	≤ 0.6	0.20 ± 0.05	200m/spool	Round
1.5	1.5 ± 0.2	0.12 ± 0.05	≤ 0.9	0.20 ± 0.05	200m/spool	Round
2.0	2.0 ± 0.2	0.12 ± 0.05	≤ 1.3	0.20 ± 0.05	200m/spool	Round
2.5	2.5 ± 0.2	0.12 ± 0.05	≤ 1.5	0.20 ± 0.05	200m/spool	Round
3.0	3.0 ± 0.2	0.12 ± 0.05	≤ 1.8	0.20 ± 0.05	200m/spool	Round
3.5	3.5 ± 0.2	0.12 ± 0.05	≤ 2.0	0.20 ± 0.05	100m/spool	Round
4.0	4.0 ± 0.3	0.15 ± 0.05	≤ 2.5	0.25 ± 0.05	100m/spool	Round
4.5	4.5 ± 0.3	0.15 ± 0.05	≤ 2.8	0.25 ± 0.05	100m/spool	Round
5.0	5.0 ± 0.3	0.15 ± 0.05	≤ 3.0	0.25 ± 0.05	100m/spool	Round
6.0	6.0 ± 0.3	0.15 ± 0.05	≤ 3.8	0.25 ± 0.05	100m/spool	Round
7.0	7.0 ± 0.3	0.15 ± 0.05	≤ 4.0	0.25 ± 0.05	100m/spool	Round
8.0	8.0 ± 0.3	0.15 ± 0.05	≤ 4.8	0.30 ± 0.05	1.00m/pc	Flat
9.0	9.0 ± 0.3	0.20 ± 0.05	≤ 5.0	0.30 ± 0.05	1.00m/pc	Flat
10.0	10.0 ± 0.3	0.20 ± 0.05	≤ 5.8	0.30 ± 0.05	1.00m/pc	Flat
11.0	11.0 ± 0.3	0.20 ± 0.05	≤ 6.4	0.30 ± 0.05	1.00m/pc	Flat
12.0	12.0 ± 0.3	0.20 ± 0.05	≤ 7.0	0.30 ± 0.05	1.00m/pc	Flat
13.0	13.0 ± 0.3	0.22 ± 0.05	≤ 7.5	0.35 ± 0.05	1.00m/pc	Flat
14.0	14.0 ± 0.3	0.22 ± 0.05	≤ 8.0	0.35 ± 0.05	1.00m/pc	Flat

Technical Data

Property	Method Test	Typical Performance
Tensile Strengtn(MPa)	ASTMD 2671	19
Elongation(%)	ASTMD 2671	200
Cold impact (-65℃)	ASTMD 2671 Method C	No cracking
Flammablity	ASTMD 2671	VW-1
Dielectric strength(kv/mm)	IEC243	26
Volume resistivity(Ω.cm)	ASTM D876	1.0X10 ¹⁶



RSFR-DR

Diesel Resistant Flexible Elastomeric Heat Shrink Tubing

Diesel resistant elastomeric heat shrink tubing for protecting cables, wire harness and brake lines in transportation and military applications where resistance to diesel, oil, hydraulic fluids and other chemicals is critical



Features

- 2:1 shrink ratio
- Long term resistance to diesel, hydraulic fluids and chemicals
- Flexible
- Flame retardant
- High abrasion and cut resistance
- Continuous operating temperature:-55℃-150℃
- Shrink temperature:130℃
- Meets 23053/16

Dimensions

Size		Expanded	Recovered		Standard Package	Round/Flat
Inch	mm	Internal Diameter (mm)	Internal Diameter (mm)	Wall Thickness (mm)		
1/8	3.2	3.2	1.6	0.76 ± 0.15	200m/spool	Round
3/16	4.8	4.8	2.4	0.84 ± 0.15	100m/spool	Round
1/4	6.4	6.4	3.2	0.89 ± 0.15	100m/spool	Round
3/8	9.5	9.5	4.8	1.02 ± 0.20	50m/spool	Round
1/2	12.7	12.7	6.4	1.22 ± 0.20	25m/spool	Round
3/4	19.0	19.0	9.5	1.45 ± 0.28	25m/spool	Round
1	25.4	25.4	12.7	1.78 ± 0.28	25m/spool	Round
1-1/2	38.1	38.1	19.0	2.41 ± 0.41	25m/spool	Round
2	50.8	50.8	25.4	2.79 ± 0.41	25m/spool	Round
3	76.0	76.0	38.0	3.18 ± 0.50	1.00m/pc	Flat

Note: 3:1 shrink ratio is available upon request

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥10.4	11.5
Elongation(%)	ASTM D2671	≥400	450
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥8.0	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥220	350
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Flammability	VW-1	Pass	Pass



RSFR-VDF175

THIN WALL PVDF Heat Shrink Tubing

Transparent, thin wall PVDF (polyvinylidene fluoride) heat shrink tubing
ideal for electronic, automotive and military applications requiring
protection and see-through inspection in aggressive environments



Features

- 2:1 shrink ratio
- Long term resistance to diesel, hydraulic fluids and chemicals
- Semi-rigid
- Flame ratardant
- High abrasion and cut resistance
- Continuous operating temperature:-55℃-175℃
- Shrink temperature:175℃
- Meets 23053/18

Dimensions

Size		Expanded	Recovered		Standard Package M/Spool	Round/Flat
Inch	mm	Internal Diameter (mm)	Internal Diameter (mm)	Wall Thickness (mm)		
3/64	1.2	1.2	0.6	0.25 ± 0.05	200	Round
1/16	1.6	1.6	0.8	0.25 ± 0.05	200	Round
3/32	2.4	2.4	1.2	0.25 ± 0.05	200	Round
1/8	3.2	3.2	1.6	0.25 ± 0.05	200	Round
3/16	4.8	4.8	2.4	0.25 ± 0.05	100	Round
1/4	6.4	6.4	3.2	0.30 ± 0.05	100	Round
3/8	9.5	9.5	4.8	0.30 ± 0.05	50	Round
1/2	12.7	12.7	6.4	0.30 ± 0.05	50	Round
3/4	19.1	19.1	9.5	0.42 ± 0.05	50	Round
1	25.4	25.4	12.7	0.50 ± 0.05	50	Round
1-1/2	38.1	38.1	19.1	0.50 ± 0.05	50	Round

Note: 3:1 shrink ratio is available upon request

Property	Test Method	Typical Performance
Tensile Strengtn(MPa)	ASTM D 2671	≥30
Elongation(%)	ASTM D 2671	≥150
Tensile	250℃X168hr	≥100
Elongation	No cracking	-55℃X 4h
Flammability	ASTM D 2671	VW-1
Volume resistivity(Ω.cm)	IEC 60093	≥10 ¹³



RSFR-VT200

Thin Wall Fluoroelastomer Heat Shrink Tubing

Thin wall Viton fluoroelastomer heat shrink tubing suitable for use in electronic systems and components in automotive, military/ aerospace and industrial applications requiring outstanding heat and fluid resistance.



Features

- 2:1 shrink ratio
- High withstand to corrosive fluids in extreme temperatures
- Flame retardant
- Very flexible
- Easy to stamped
- Continuous operating temperature:-55℃-200℃
- Shrink temperature:175℃
- Meets 23053/13

Dimensions

Size		Expanded	Recovered		Standard Package M/Spool	Round/Flat
Inch	mm	Internal Diameter (mm)	Internal Diameter (mm)	Wall Thickness (mm)		
1/8	3.2	3.2	1.6	0.75 ± 0.20	200	Round
3/16	4.8	4.8	2.4	0.89 ± 0.20	100	Round
1/4	6.4	6.4	3.2	0.89 ± 0.20	100	Round
3/8	9.5	9.5	4.8	0.89 ± 0.20	50	Round
1/ 2	12.7	12.7	6.4	0.89 ± 0.20	25	Round
3/4	19.0	19.0	9.5	1.07 ± 0.30	25	Round
1	25.4	25.4	12.7	1.25 ± 0.30	25	Round
1-1/ 2	38.1	38.1	19.0	1.40 ± 0.30	25	Round
2	50.8	51.0	25.4	1.65 ± 0.30	25	Round

Note: 3:1 shrink ratio is available upon request

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥8.5	10.0
Elongation(%)	ASTM D2671	≥250	300
Tensile Strengtn after aging (MPa)	UL224 158℃X168hr	≥7.3	8.5
Elongation after aging(%)	UL224 158℃X168hr	≥200	250
Dielectric strength(kv/mm)	IEC243	≥15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥1X10 ⁹	2.5X10 ⁹
Flammability	VW-1	Pass	Pass



SRG-N/W

Silicone Rubber Braided Tube

General insulating protection for various household appliances, light fitting, machines, electronic instruments, etc



Features

- Two types: Inner fiberglass outside braided silicone rubber(SRG-N)
Inner silicone rubber outside fiberglass braided(SRG-W)
- Operating temperature:-55℃-200℃
- RoHS compliant; UL approved
- Good flexibility, arc resistance, corona resistance
- Standard color: white (Other colors upon request)

Dimensions

SRG-N

Size mm	Internal Diameter (mm)	Average Wall Thickness (mm)			Standard Package M/Spool
		1500V, 2500V	4000V	7000V	
0.5	0.5 ± 0.30	0.20 ± 0.10	0.40 ± 0.10	0.45 ± 0.10	100
1.0	1.0 ± 0.30	0.20 ± 0.10	0.40 ± 0.10	0.45 ± 0.10	100
1.5	1.5 ± 0.30	0.20 ± 0.10	0.40 ± 0.10	0.45 ± 0.10	100
2.0	2.0 ± 0.30	0.20 ± 0.10	0.40 ± 0.10	0.45 ± 0.10	100
2.5	2.5 ± 0.30	0.20 ± 0.10	0.40 ± 0.10	0.50 ± 0.10	100
3.0	3.0 ± 0.35	0.23 ± 0.10	0.40 ± 0.10	0.50 ± 0.10	100
3.5	3.5 ± 0.35	0.23 ± 0.10	0.45 ± 0.10	0.55 ± 0.10	100
4.0	4.0 ± 0.35	0.23 ± 0.10	0.45 ± 0.10	0.55 ± 0.10	100
4.5	4.5 ± 0.35	0.23 ± 0.10	0.45 ± 0.10	0.55 ± 0.10	100
5.0	5.0 ± 0.45	0.30 ± 0.10	0.45 ± 0.10	0.55 ± 0.10	100
6.0	6.0 ± 0.45	0.30 ± 0.10	0.50 ± 0.10	0.60 ± 0.10	100
7.0	7.0 ± 0.60	0.35 ± 0.10	0.50 ± 0.10	0.60 ± 0.10	50
8.0	8.0 ± 0.60	0.35 ± 0.10	0.50 ± 0.10	0.60 ± 0.10	50
9.0	9.0 ± 0.60	0.35 ± 0.10	0.50 ± 0.10	0.60 ± 0.10	50
10.0	10.0 ± 0.80	0.43 ± 0.10	0.60 ± 0.10	0.65 ± 0.10	50
12.0	12.0 ± 0.80	0.43 ± 0.10	0.60 ± 0.10	0.65 ± 0.10	50

SRG-W

Size (mm)	Normal Dimension			Standard Package (m/spool)
	Internal Diameter (mm)	Wall Thickness (mm)	Average Wall Thickness(mm)	
1.0	1.0 ± 0.30	0.60	0.45 ± 0.05	200
2.0	2.0 ± 0.30	0.60	0.45 ± 0.05	200
3.0	3.0 ± 0.30	0.80	0.50 ± 0.05	100
4.0	4.0 ± 0.30	0.80	0.55 ± 0.05	100
5.0	5.0 ± 0.40	0.80	0.55 ± 0.05	100
6.0	6.0 ± 0.40	1.00	0.60 ± 0.05	100
7.0	7.0 ± 0.40	1.00	0.60 ± 0.05	50
8.0	8.0 ± 0.50	1.00	0.60 ± 0.05	50
9.0	9.0 ± 0.50	1.20	0.60 ± 0.05	50
10.0	10.0 ± 0.50	1.20	0.60 ± 0.05	50



Dimensions

Size mm	Expanded	After Recovery		Standard Package M/Spool
	Internal Diameter Min(mm)	Internal Diameter Max(mm)	Wall Thickness mm	
6	6.5	3	0.80 ± 0.15	50
8	8.5	4	0.90 ± 0.15	50
10	10.0	5	1.20 ± 0.15	50
12	12.0	6	1.20 ± 0.15	20
16	16.0	8	1.50 ± 0.20	20
20	20.0	10	1.50 ± 0.20	20
30	30.0	15	1.80 ± 0.20	20
40	40.0	20	2.00 ± 0.15	20
50	50.0	25	2.00 ± 0.20	10
60	60.0	30	2.00 ± 0.30	10
70	70.0	35	2.00 ± 0.30	10

WEPDM

Flexible EPDM Heat-Shrinkable Tubing

Suitable for jacketing and protection to cables, pipes, and connectors .

Used for protecting solder joints, wires, cables, terminals, connectors and various electronic apparatus.



2:1

Features

- 2:1 shrink ratio
- Environmental friendly
- Outstanding low and high-temperature
- Higher shrink ratio than heat shrinkable tubes
- Resists acids and alkalis
- Resists chemical solvent
- Resists ultraviolet light and weather aging
- Resists ozone
- Minimum shrink temperature: 100℃
- Minimum full recovery temperature: 135℃
- Continuous operating temperature: -45℃-125℃
- Standard color: Black



Technical Data

Property	Test Method	Typical Performance
Tensile Strength(MPa)	GB/T 528	≥14
Elongation(%)	GB/T 528	≥400
Dielectric strength(kv/mm)	IEC243	≥12
Volume resistivity(Ω .cm)	ASTM D876	≥2X10 ¹³

WRSJD

Adhesive Lined Cross-Linked Polyolefin Heat Shrink Tape

Adhesive lined, heat shrink duct and vacuum tape specifically designed for sealing joints on spiral, flexible or flat oval ducts used in heating, ventilating, air conditioning and exhaust recovery systems



Features

- 1.4:1 shrink ratio
- Eliminates air leakage in vacuum and ventilation systems
- Seals against moisture ingress and other contaminants
- Powerful adhesive bonds to galvanized steel, Aluminum and stainless steel
- Effective, reproducible seal allows for resistance to bending, vibrations and other mechanical stresses over a wide range of temperatures
- Application procedure is quick, simple and clean
- Continuous operating temperature:-45℃-125℃
- Shrink temperature: 120℃
- Color: Black, Red, Green, Yellow



Dimensions

Order Number	Width	Wall Thickness	Standard Length(m)
WRSJD-0825	25	0.80 ± 0.10	5,10
WRSJD-0850	50	0.80 ± 0.10	5,10
WRSJD-08100	100	0.80 ± 0.10	5,10
WRSJD-1025	25	1.00 ± 0.10	5,10
WRSJD-1050	50	1.00 ± 0.10	5,10
WRSJD-10100	100	1.00 ± 0.10	5,10

Technical Data

Property	Test Method	Stantard	Typical Performance
Tensile Strengtn(MPa)	ASTM D2671	≥ 10.4	11.5
Elongation(%)	ASTM D2671	≥ 300	450
Tensile Strengtn after aging (MPa)	UL224 158℃CX168hr	≥ 7.3	8.5
Elongation after aging (%)	UL224 158℃CX168hr	≥ 200	350
Dielectric strength(kv/mm)	IEC243	≥ 15	17.5
Volume resistivity(Ω .cm)	ASTM D876	≥ 1X10 ¹⁴	2.5X10 ¹⁴

Adhesive

Property	Test Method	Stantard
Water Absorption	ASTM D570	≤ 0.2 %
Sofening Point(℃)	ASTM E28	95
Strength of pearing(PE)	ASTM D 1000	120N/25mm
Strength of pearing(AL)	ASTM D 1000	80N/25mm



WPET

Expandable Sleeve

PET(polyethylene terephthalate) material, excellent application for various bundle wires, wiring harness and hoses protection, etc



1.4:1

Features

- Good flexibility, easy to bend
- Excellent abrasion resistance
- Convenient installation
- Continuous operating temperature:-45℃-125℃
- Fusing point: 250℃ ±5℃
- Flame retardant rating: Self-extinguish
- Color: Black or upon request

Dimensions

Number	Width	Number	Standard Lengthh(m)
1	φ 3*.BLACK.PET(1***/0.25**** × 24**)	17	φ 10.BLACK.PET(3/0.25 × 32)
2	φ 3.BLACK.PET(1/0.20 × 32)	18	φ 10.BLACK.PET(3/0.20 × 40)
3	φ 4.BLACK.PET(1/0.25 × 32)	19	φ 12.BLACK.PET(3/0.25 × 40)
4	φ 4.BLACK.PET(1/0.20 × 40)	20	φ 12.BLACK.PET(3/0.20 × 48)
5	φ 5.BLACK.PET(1/0.25 × 40)	21	φ 14- φ 16..BLACK.PET(3/0.25 × 48)
6	φ 5.BLACK.PET(1/0.20 × 48)	22	φ 14- φ 16.BLACK.PET(3/0.20 × 56)
7	φ 6.BLACK.PET(1/0.25 × 48)	23	φ 18- φ 20.BLACK.PET(3/0.25 × 56)
8	φ 6.BLACK.PET(1/0.20 × 56)	24	φ 18- φ 20.BLACK.PET(3/0.20 × 64)
9	φ 6.BLACK.PET(1/0.20 × 24)	25	φ 22.BLACK.PET(3/0.25 × 64)
10	φ 7.BLACK.PET(1/0.25 × 56)	26	φ 22.BLACK.PET(3/0.20 × 72)
11	φ 7.BLACK.PET(1/0.20 × 64)	27	φ 25.BLACK.PET(3/0.25 × 72)
22	φ 8.BLACK.PET(1/0.25 × 64)	28	φ 25.BLACK.PET(3/0.20 × 64)
13	φ 8.BLACK.PET(1/0.20 × 72)	29	φ 28.BLACK.PET(3/0.25 × 64)
14	φ 8.BLACK.PET(1/0.25 × 24)	30	φ 32.BLACK.PET(3/0.25 × 72)
15	φ 8.BLACK.PET(1/0.20 × 32)	31	φ 36.BLACK.PET(3/0.25 × 64)
16	φ 10.BLACK.PET(1/0.25 × 72)	32	φ 40.BLACK.PET(3/0.25 × 72)

- *) folded diameter of PET sleeve
- **) quantity of strands
- ***) quantity of string of each strand
- ****) diameter of each string



WOLVO

Skidproof Heat Shrink Tubing

Polyolefin tubing with skidproof figured surface, used for various fishing tackles, sport fittings, and equipments and commodities with hand device.



Features

- Good abrasion resistant and anti-skid performance
- High flexibility
- Quick installation
- Continuous operating temperature:-55℃-125℃
- Shrink temperature: started at 70℃, full recovery at 110℃
- Standard color: Black, Red, Yellow, Green, Blue



Dimensions

Size	Expanded		After Recovery		Standard Package M/pc
	Internal Diameter mm	Wall Thickness mm	Internal Diameter mm	Wall Thickness mm	
15	15	0.45±0.15	8.0	0.85±0.15	1.0
18	18	0.45±0.15	10.0	0.85±0.15	1.0
20	20	0.50±0.15	11.0	0.90±0.15	1.0,1.6
22	22	0.50±0.15	12.5	0.90±0.15	1.0,1.6
25	25	0.50±0.15	14.5	1.00±0.15	1.0,1.6
28	28	0.50±0.15	15.5	1.00±0.15	1.0,1.6
30	30	0.60±0.15	17.5	1.20±0.15	1.0,1.6
35	35	0.60±0.15	20.0	1.20±0.15	1.0,1.6
40	40	0.60±0.15	23.0	1.20±0.15	1.0,1.6
45	45	0.65±0.15	25.0	1.25±0.15	1.0,1.6
50	50	0.65±0.15	28.0	1.25±0.15	1.0,1.6

Technical Data

Property	Test Method	Typical Performance
Tensile Strength(MPa)	ASTM D2671	≥10.4
Elongation(%)	ASTM D2671	≥200